


Grid coupling with Horizontal cover

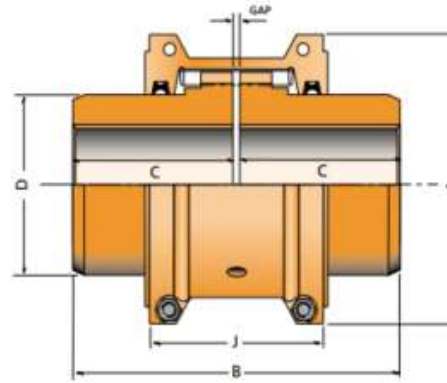

Rev 1 10/22

Size	Coupling Rating Nm	Max Speed	Min Bore mm	② Max Bore mm	① Cplg Wt. kg	① MR ² /	Dimensions in mm				
							A	B	C	D	Gap
2020	48	4500	13	27	1.8	0.0014	102	98	47.5	39.7	3.2
2030	136	4500	13	35	2.4	0.0022	111	98	47.5	49.2	3.2
2040	226	4500	13	44	3.2	0.0033	118	105	50.8	57.2	3.2
2050	395	4500	13	51	5.2	0.007	138	124	60.3	66.7	3.2
2060	621	4350	19	57	7.1	0.012	151	130	63.5	76.2	3.2
2070	904	4125	19	68	10.1	0.018	162	156	76.2	87.3	3.2
2080	1864	3600	25	83	17.7	0.045	194	181	88.9	104.8	3.2
2090	3390	3600	25	95	24.5	0.0787	213	200	98.4	123.8	3.2
2100	5706	2440	42	108	41.3	0.18	251	246	120.6	142.1	4.8
2110	8474	2250	42	117	53.6	0.27	270	259	127	160.4	4.8
2120	12428	2025	60	137	78.7	0.51	308	305	149.2	179.4	6.4
2130	18078	1800	66	165	118	0.99	347	330	161.9	217.5	6.4
2140	25987	1650	66	184	176	1.85	384	375	184.1	254	6.4
2150	37000	1500	108	215	228	3.49	453	372	183	270	6.4
2160	51000	1350	120	240	310	5.82	502	402	198	305	6.4
2170	67800	1225	135	280	448	10.42	567	438	216	356	6.4
2180	94000	1100	150	300	619	18.3	630	484	239	394	6.4
2190	124000	1050	150	335	776	26.14	676	524	260	437	6.4
2200	169000	900	178	360	1057	43.49	757	565	280	498	6.4